

HIGH PERFORMANCE 60 CELL POLYCRYSTALLINE SOLAR PHOTOVOLTAIC MODULE

CNPV-260P, CNPV-255P, CNPV-250P, CNPV-245P

Optimal Premium

Series by

CNPV^{POWER}

MOREPOWER

3% Positive Tolerance

CNPV's positive tolerance on label rating power provides higher kWh for money invested.

ARC Glass

Low iron, anti reflective coated glass gives 2% Energy gain.

Cell & Module Matching

Matching gives 2% additional power gain measured at STC conditions.

Independent Performance Verification

Independently verified by Photon and Öko-Test as amongst the best kWh/kWp output worldwide.

100% Electro Luminescence

EL screening provides defect free modules.

Accredited ammonia/salt mist resistance

Long life in marine and high pollution environments.

International Bankability

Pre-approved with financial institutions and rapid capability ensures customers' cost of project is reduced.

**ISO9001
ISO14001
OHSAS18001**

Audited controls for high value consistency.

FOR LONGER

True Linear Warranty 25 years

Highest power warranty coverage available on a linear basis.

Workmanship Warranty 10 years

10 years global workmanship warranty.

Strength 5400Pa

Industry leading snow loading capacity.

Degradation Resistance

Superior resistance to PID.

Low Carbon Footprint

One of the lowest carbon footprints over 100 years life cycle.

Green Credentials

Fully committed to recycling during production and end of product life, a dedicated member of PV cycle.

Eco Friendly Packaging

Friendly materials choice with high density packing.

ISO14001 accredited ISO

Continuous improvement in reducing environmental impact.



MUCH SAFER

AND GREENER

About CNPV

CNPV Solar Power, is a leading integrated manufacturer of solar photovoltaic products, that designs, manufactures and supplies highly efficient and cost effective crystalline solar photovoltaic modules. Reliability & longevity are built into our world-class crystalline solar photovoltaic modules, which undergo rigorous internal tests and external certifications (IEC61215, IEC61730, UL and CE) to ensure peak performance and safety. For further information, please visit CNPV's website at <http://www.cnpv-power.com>, please contact us at marketing@cnpv-power.com.



Electrical Data	CNPV-240P	CNPV-245P	CNPV-250P	CNPV-255P	CNPV-260P
Peak Power Watts-Pmax (Wp)	240	245	250	255	260
Power Output Tolerance-Pmax (%)	0/+3	0/+3	0/+3	0/+3	0/+3
Maximum Power Voltage-Vmp (V)	29.20	29.60	30.10	30.60	31.05
Maximum Power Current-Imp (A)	8.24	8.28	8.32	8.36	8.40
Open Circuit Voltage-Voc (V)	37.40	37.60	37.80	38.00	38.20
Short Circuit Current-Isc (A)	8.78	8.82	8.86	8.90	8.94
Encapsulated Solar Cell Efficiency-ηc (%)	16.4	16.8	17.1	17.5	17.8
Module Efficiency-ηm (%)	14.7	15.0	15.3	15.6	15.9

Values at Standard Test Conditions STC (Air Mass AM 1.5, Irradiance 1000W/m², Cell Temperature 25°C)

Mechanical Data	
Solar Cells	Poly Crystalline 156×156mm
Cells Configuration	60 cells (6×10)
Module Dimension	1650×992×35mm(64.96"×39.06"×1.38")
Weight	18Kg(39.68lb)
Glass	High transmission tempered glass with ARC
Frame	Anodized aluminium alloy type 6063T5; Color: Silver
J-box	Potted , IP67, 1000VDC, TÜV&UL certified with 3 schottky bypass diodes
Cables/Connector	4.0mm ² (12AWG), TÜV&UL certified/IP67, Type IV

Temperature Ratings	
Nominal Operating Cell Temperature (NOCT)	45±2°C(113±35.6°F)
Temperature Coefficient of Pmax	- 0.40%/°C(-0.22%/°F)
Temperature Coefficient of Voc	- 0.32%/°C(-0.18%/°F)
Temperature Coefficient of Isc	0.05%/°C(0.028%/°F)

Warranty	
10 years workmanship warranty	
25 years world's first true linear performance warranty	




(Please refer to CNPV product warranty for details)

Maximum Ratings	
Operational Temperature	-40~+85°C
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	15A

Packaging Configuration	
Modules per box	30 pcs
Modules per 40 ft high cubic container	840 pcs
Modules per 20 ft container	300 pcs
Dimensions of Pallet (L×W×H)	1705×1145×1186mm
Gross Weight	615kg




I-V Characteristics at Different Irradiance & Temperature

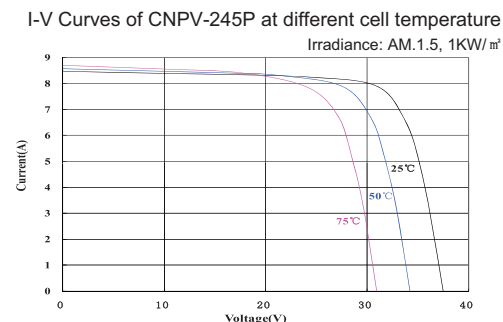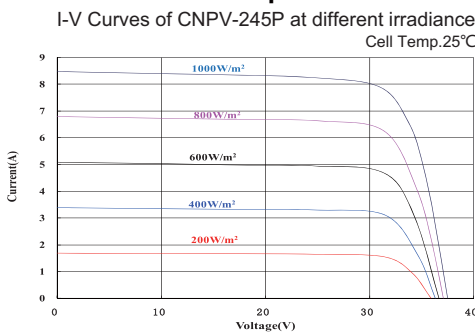

Module Efficiency Up to **15.9%** Wattage Up to **260W** Years Warranty **25**

Dimensional Characteristics

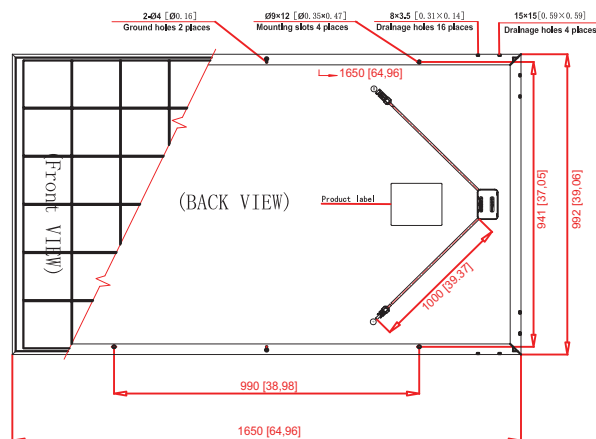

DISCLAIMER: specifications included in this datasheet are subject to change without previous notice from the company. In case of any conflicts/problems that may arise due to misinterpretation, prevailing conditions are the ones described in the original version (in English).

CNPV Dongying Solar Power Company Limited
E-mail:marketing@cnpv-power.com
Web:www.cnpv-power.com

Our Partners: